


BRUNNER FIREPLACES





## Eck-Kamin 70/33/33 lifting doors (easy-lift)

State: 21.01.2015



**BRUNNER**<sup>®</sup>  
*made in germany*

Dimension sheet | **Eck-Kamin 70/33/33 lifting doors (easy-lift)**

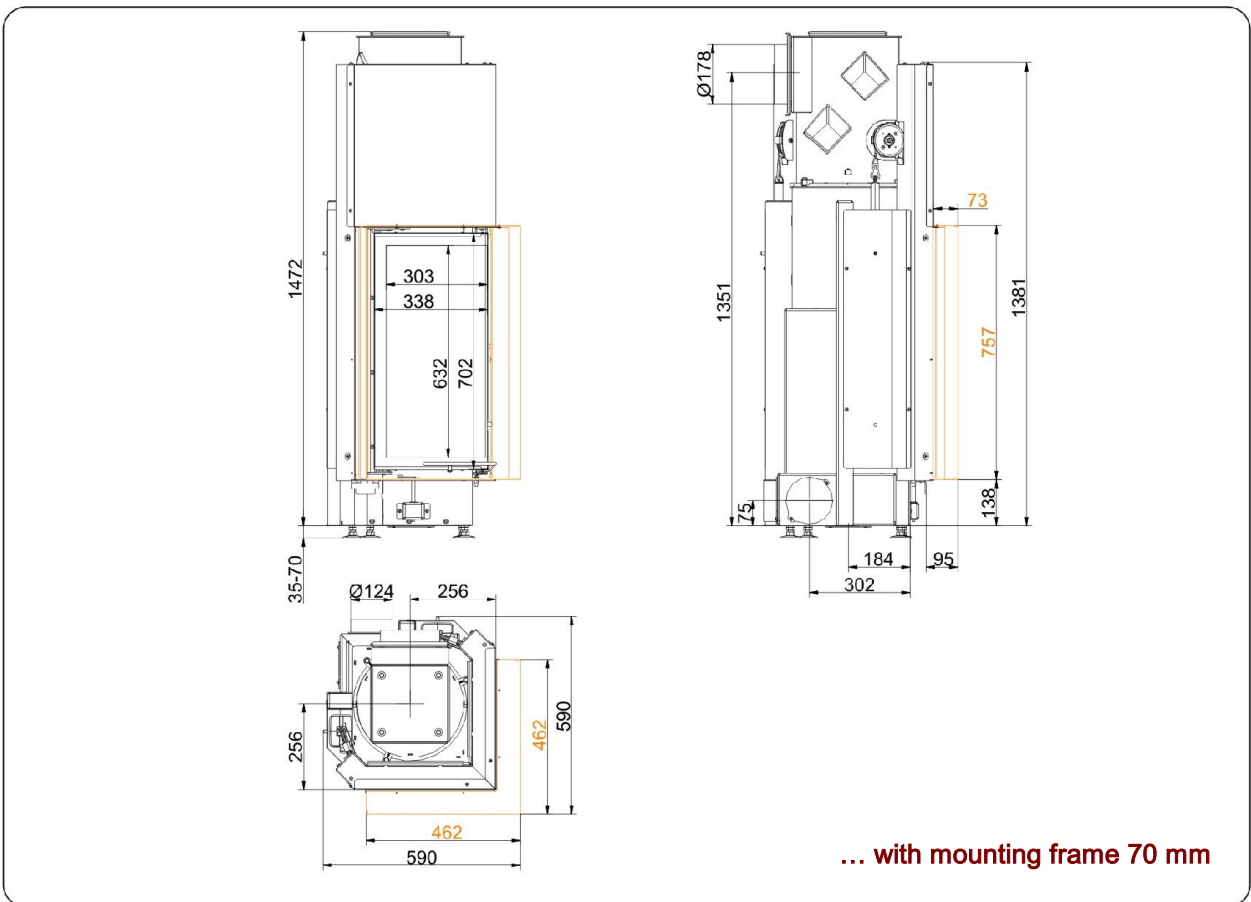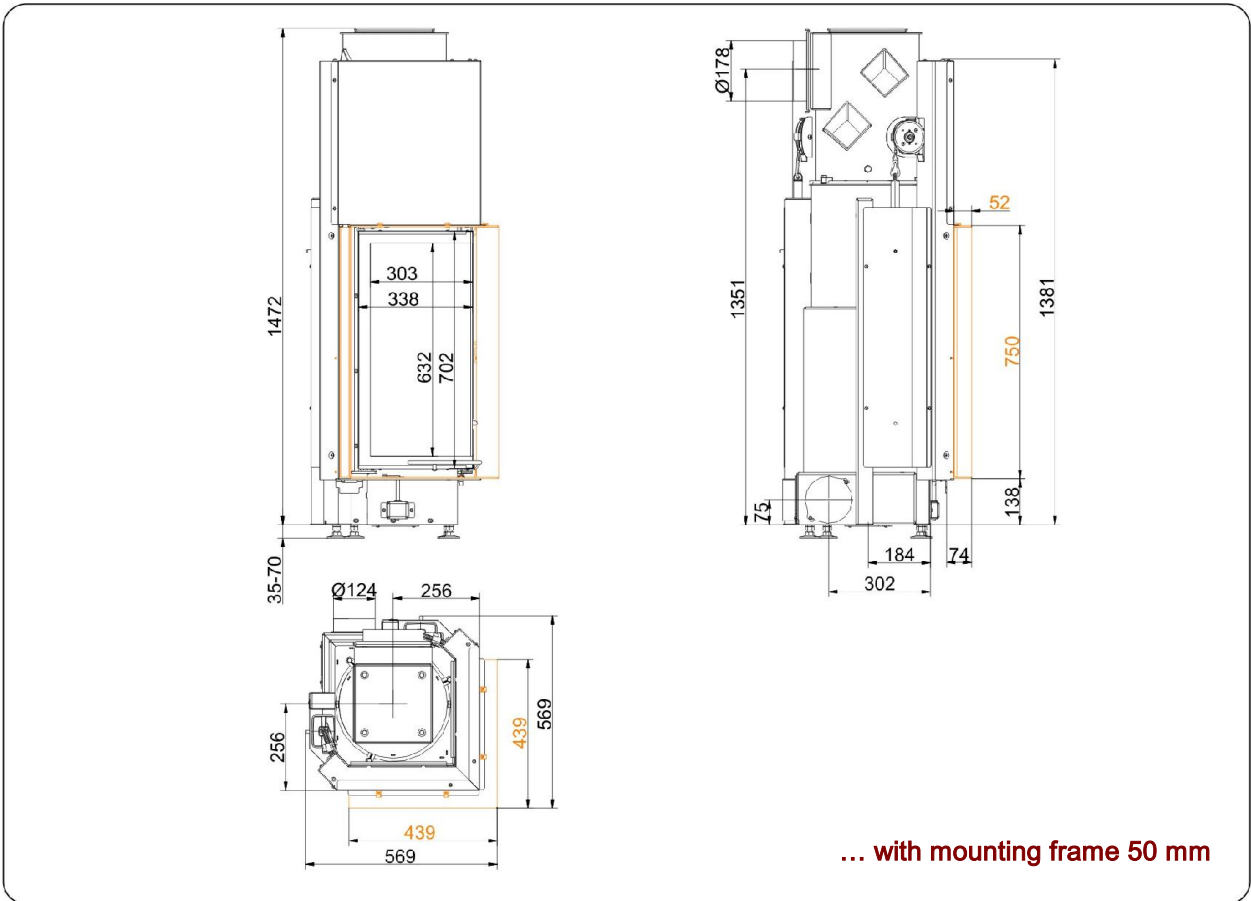

We suggest for CAD planing Palette CAD. Permanent updated drawings: [www.brunner.de](http://www.brunner.de)  
 Frames / front versions are marked colored.

# Planning and installation

## Eck-Kamin 70/33/33

Tested according to	EN 13229 W	EN 13229 WA
Values measured at	nominal load	accumulation
Suitable for all construction types according to rules	OK	OK

### Data for functional demonstration

Rated heat power	kW	8	-
Firewood consumption	kg/h	3	5
Combustion performance	kW	10	22
Flue gas mass flow	g/s	9,5	21
Outlet temperature (before heating surface)	°C	-	340
Flue gas temperature after			
attached steel smoke hood	°C	193	246
adjoining cast iron radiator (GNF10)	°C	-	-
accumulation rings (MAS) <sup>1)</sup>	°C	-	-
adjoining ceramic accumulator <sup>2)</sup>	°C	-	-
accumulation stones (MSS)	°C	-	-
water boiler	°C	-	-
Necessary supply pressure	Pa	12	15
Combustion air consumption	m <sup>3</sup> /h	30	50
Combustion air connection Ø	mm	125	125

### Heat distribution

Insert / heating surface	%	25 / 30	25 / 30
Glass (single / double)	%	45 / -	45 / -
Boiler	%	-	-

### Cross-section of gratings for max. warm air power

Supply air	cm <sup>2</sup>	500 / 100 / 300	500 / 100 / 300
Warm air	cm <sup>2</sup>	500 / 100 / 300	500 / 100 / 300

### Minimal oven surface for closed construction type

Surface giving off heat	m <sup>2</sup>	4,0	4,0
-------------------------	----------------	-----	-----

### Space inside oven chamber

Distance to oven chamber wall	cm	8	8
Distance to floor	cm	15	15

### Heat insulation without / with <sup>3)</sup> air gratings

Wall	cm	14 / 10	14 / 10
Floor	cm	2 / 2	2 / 2
Ceiling	cm	16 / 12	16 / 12
Insulation of additional fire door DHT	cm	-	-
Brick lining of protected walls	cm	10	10

### Weight

Fireplace + burning chamber	kg	159 + 35
-----------------------------	----	----------

### meets requirement limit values for

Germany / Austria / Switzerland / Norway	1.BImSchV (Stufe 2) / 15a BVG (2015) / LRV / NS 3059
--	--

- 1) Throttle flap recommended
- 2) Approximate value, must be calculated eventually
- 3) Values with air gratings, stove casing is heat conducting

Ulrich Brunner GmbH  
Zellhuber Ring 17 -18  
D-84307 Eggenfelden  
Phone: +49 / (0)87 21 / 7 71-0  
Fax: +49 / (0)87 21 / 7 71-100  
info@brunner.eu | www.brunner.eu

**BRUNNER**<sup>®</sup>

BRUNNER products are offered and sold only by qualified dealers and service centres.  
Subject to technical and assortment changes. Errors excepted. (01/15)